

Monarch®

9652[™] Printer

Economical, medium volume label and tag printer

Monarch® 9652™ Tabletop barcode printer – robust enough to fit in anywhere!

The economical Monarch 9652 printer offers high performance thermal direct/transfer printing. With is rugged industrial metal casing it can withstand the toughest of environments from warehouse distribution centres to back room offices in retail stores.

The 9652 printer is a complete solution in a box that offers users everything they need to get started, with key features including:

- Print speed of up to 4" (102mm) per second.
- Industrial metal casing for complete protection.

- · On demand or continuous printing.
- Windows driver for compatibility to Windows 95/98 and NT.
- Speedy label design software allowing the user to create and print labels with bar codes, texts and graphics.
- Free label and ribbon sample roll to get user up and running.
- All popular barcode symbologies supported.
- Serial and parallel communications ports as standard.




9652™ Printer – Ideal for medium volume label and tag production.

The 9652 printer can be used in a variety of applications that can include:

- Distribution Centres Box end marking and put away marking Pallet labelling
- · Manufacturing facilities Product marking/identification Compliance labelling
- Retail Pre merchandising marking Item marking



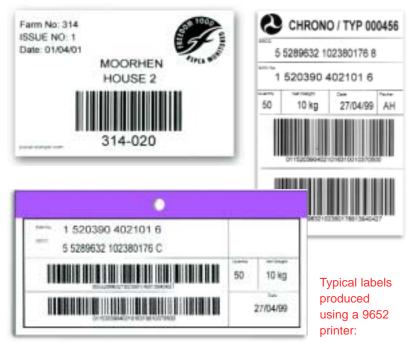

9652[™] Product Specification

Standard Features

PRINTING METHOD

Thermal Transfer/Direct

DIMENSIONS

Height 260mm (10.2") Width 250mm (9.8") Depth 410mm (16.0") Weight 11kg (24.6lbs)

PRINTHEAD

102mm wide (4") 203 DPI - 8 dots/mm

PC/HOST INTERFACE

- RS-232 Serial
- · Centronics parallel

MEMORY

16-Bit Processor 512Kb RAM (9652E) 32-Bit Processor 2Mb RAM (9652M)

STANDARD FONTS

International character sets 5 alphanumeric fonts 1.25mm - 6mm expandable x 24 Soft fonts downloadable with optional 512Kb card

BAR CODE SYMBOLOGIES

- EAN 8, 13, +2, +5, 128
- UPC A, E, +2, +5
- Interleaved 2 of 5
- Extended Code 39
- CODABAR
- Code 128 (Subset A, B, C)
- Code 93
- Code 128 UCC
- MAXICODE
- PDF417
- POSTNET
- Matrix 25

ribbon

OPTIONAL ACCESSORIES

512Kb card for downloading soft fonts Standalone keyboard Real time clock

SUPPLY SIZES

Widths 25mm to 110mm (1.0" to 4.0") Lengths 13mm to 1143mm (0.4" to 45") Supply roll contains 180 meters of supply Ribbon rolls contain 360 meters of

RIBBON WIDTHS

33mm (1.3"), 64mm (2.5"), 84mm (3.3"), 109mm (4.3")

MAXIMUM PRINT AREA

110mm x 1143mm (4.0" x 45")

Performance

POWER

220 V / 50Hz

PRINTING RATE

51mm (2.0") per second 102mm (4.0") per second 152mm (6.0") per second (9652M)

Environment

TEMPERATURE

Operating 40°F to 100°F (4C° to 38°C)

HUMIDITY

Operating and storage 10% to 90% non condensing

Paxar UK Ltd. Tel: +44 (0)1279 824000 Fax: +44 (0)1279 828484

www.paxar-europe.com Contact sales@paxar.co.uk



